

NOTICE INVITING TENDER

Following Tenders based on Pak PWD Schedule of Rates 2022 for Civil Electric and plumbing works are hereby invited from approved government contractors registered with Pakistan Engineering Council in relevant category. Completion time limits up to 30-06-2025.

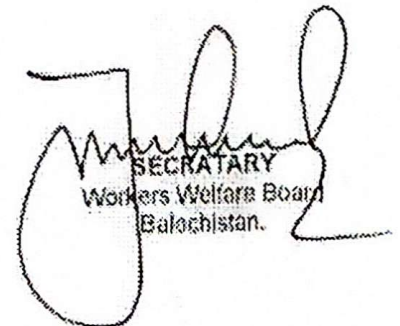
S.No	Item / Component	Estimated Cost in Million	Earnest Money	Tender Fee
1	Annual repair of Boys High School at Gai-Khan Chowk, Sariab Road Quetta.	4.749	4% of Bid cost	3000
2	Annual repair of Boys High School at Muslim Bagh.	4.595	4% of Bid cost	3000
3	Annual repair of Boys High School at Dalbandin.	5.031	4% of Bid cost	3000
4	Annual repair of Boys High School at Pishin.	4.934	4% of Bid cost	3000
5	Annual repair of Boys High School at Kingri.	4.448	4% of Bid cost	3000
6	Annual repair of Girls High School at Eastern By Pass, Quetta.	4.530	4% of Bid cost	3000
7	Annual repair of Girls High School at Nawa Killi, Quetta.	4.857	4% of Bid cost	3000
8	Annual repair of Office Building Samangli Road, Quetta.	4.885	4% of Bid cost	3000
9	Annual repair of Boundary wall at nawa killi new labour colony Quetta	4.026	4% of Bid cost	3000
10	Annual & Special repair of Boys High School at Loralai	5.870	4% of Bid cost	3000

The procurement will be carried out in accordance with Public Procurement Regulatory Authority (PPRA) Rule 2004 (updated on web site).

ELIGIBILITY:- 1- The Contractor must have valid registration with Pakistan Engineering Council in relevant category C-6 (CE10-i) and above, renewed up to year 2025. 2- Registration with Income Tax Authorities i-e NTN & ATL (Active). 3- Three assignment of similar nature with complexity of Rs 30 million in previous 3 years (work orders and completion certificates are required). 4- Last three years Financial Audit reports 2021-24 required. 5- Annual turnover attest Rs.30 million in last 3 years (bank certificate required). **METHOD OF PROCUREMENT:-** "Single stage two envelop basis" (Technical & Financial bid). **TENDER DOCUMENTS:-** Tender form will be issued next day from the date of advertisement published in newspapers up to 10/03/2025 during office hours on payment (as mentioned above duly deposited through UBL account No 0476-211397405 in favor of Secretary WWB on mentioned against each category (Non Refundable) from the office of Director Works WWB Samangli Road Quetta and also available on PPRA web site. **OPENING OF TENDER:-** All the tenders shall be submitted on 11/03/2025 up to 1:00 P.M and all shall be opened only technical bid on same date at 02:00 P.M in presence of participating bidders and procurement committee members. The financial bid will be opened only for contractors who have qualified in the technical bid. They will be notified via an official letter or WhatsApp. This tender can also be seen on PPRA Website TS # _____. Please prepare the technical proposal in accordance with the NIT and include all necessary documents. The call deposit (original + 2 copies) must be attached to the technical bid, while one photocopy should be included with the financial bid.

ADDRESS: Workers Welfare Board Balochistan, near Kidney Centre, Samangli Road Quetta. Ph 081-9204747.

Other details or additional information, if required, can be obtained from the office of the Director Works, Workers Welfare Board, during office hours.


SECRETARY
Workers Welfare Board
Balochistan.

BALUCHISTAN WORKERS WELFARE BOARD
S.No 01= Annual repair of Boys High School, Gai Khan Chowk Quetta
As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	White Wash 3 renewal coats	21,450	146/449	P%Sft		
2	Distempering 3 Renewal Coat	27,950	160/450	P%Sft		
3	Repainting 2 coat on wall	6,350	171/451	P%Sft		
4	Weather shield 2 Renewal Coat	19,450	169/451	P%Sft		
5	Repainting 2 coat on wood work	1,650	165/450	P%Sft		
6	Repainting 2 coats on iron work	2,839	163/450	P%Sft		
7	P/L Panel Door Shutter	140.00	22/313	P-Sft		
8	P/F wire gauze	230.00	106/444	P%Sft		
9	P/F Broken glass	850.00	296/343	P%Sft		
10	P/F 3" thick 1:2:4 floor	2,560.00	7/231	P%Sft		
11	P/L 3/4" thick patch plaster	6,540.00	29/435	P%Sft		
12	P/Making man hole cover	5.00	29/595	P-Sft		
13	1:2:4 in Col SS	25.00	24/176+ 136/195	P%Cft		
14	Earth filling	1,650	8/48	P%Cft		
15	P/F G.I pipe 3/4"	250	2/565	P-Rft		
16	P/L PPRC 1"	150	30/567	P-Rft		
17	P/F 400 gallon Tank	1	28/577	P-No		
18	P/F wash hand basin complete	3	9/554+ 10/554	P-No		
19	P/F WC	5	3/353	P-No		
20	P/F Glazed tile on wall	185	40/165	P%Sft		
21	P/F Glazed tile on floor	45	81/242	P%Sft		
	Electrical items					
1	Supplying & installation Ceiling Fan 56" size	8.00	02-80-03	P-No		
2	Piano switch	26	2-64-01	P-No		
3	Supplying & installation Tube Light	20	2-78-03	P-No		
4	Point wiring	45	02-01-01	P-Point		

BALUCHISTAN WORKERS WELFARE BOARD
S.No 01= Annual repair of Boys High School, Gai Khan Chowk Quetta
As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
	P/F 3 pin socket	4	02-64-16	P-No	771	3,084
	Sub Total on at par					
	Add/Below _____% on at par					
	TOTAL BID AMOUNT					

In Figure _____

Signature of Contractor _____

BALOCHISTAN WORKERS WELFARE BOARD

S.No 02= Annual repair of Boys High School, at Muslim Bagh

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	White Wash 3 renewal coats on ceiling and Boundary wall	37,200	146/449	P%Sft		
2	Distemping 2 Renewal Coat	47,750	159/450	P%Sft		
3	Weather shield 2 Renewal Coat	23,030	169/451	P%Sft		
4	Repainting 2 coat on wood work	3,795	165/450	P%Sft		
5	Repainting 2 coats on iron work	4,896	163/450	P%Sft		
6	P/L Panel Door Shutter	64.00	22/313	P-Sft		
7	P/F wire gauze	264.00	106/444	P%Sft		
8	P/F Broken glass	654.00	296/343	P%Sft		
9	P/F 3" thick 1:2:4 floor in repair	1,250.00	92/443	P%Sft		
10	P/L 3/4" thick patch plaster	4,250.00	29/435	P%Sft		
11	P/L PPRC 3/4"	350	29/567	P%Sft		
12	P/F Bib Cock	8	2/570	P%Sft		
13	bath room set for bath	2	9/557	P No		
14	P/L PPRC 1"	564	30/567	P%Sft		
15	P/F wash hand basin complete	4	9/554+ 10/554	P%Sft		
16	P/F WC	1	3/353	P%Sft		
	Electrical items					
1	Supplying & installation Ceiling Fan 56" size	15	02-80-03	P-No		
2	Piano switch	65	2-64-01	P-No		
3	P/F Holder	5	2-67-01	P-No		
3	Supplying & installation Tube Light	25	2-78-03	P-No		
4	Point wiring	15	02-01-01	P-Point		

BALOCHISTAN WORKERS WELFARE BOARD

S.No 03= Annual repair of Boys High School, at Dalbandin

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	Distemping 3 Renewal Coat	53,705	160/450	P%Sft		
2	White Wash 3 renewal coats on ceiling and Boundary wall	17,400	146/449	P%Sft		
3	Weather shield 2 Renewal Coat	31,500	169/451	P%Sft		
4	Repainting 2 coat on wood work	3,793	165/450	P%Sft		
5	Repainting 2 coats on iron work	4,208	163/450	P%Sft		
6	P/L Panel Door Shutter	125	22/313	P-Sft		
7	P/F Broken glass	650	296/343	P%Sft		
8	P/F 3" thick 1:2:4 floor in repair	560	92/443	P%Sft		
9	P/L tough paver	500	177/255	P Sft		
10	P/L 3/4" thick patch plaster	2,560	29/435	P%Sft		
11	P/L PPRC 3/4"	150	29/567	P-Rft		
12	P/L PPRC 1"	325	30/567	P-Rft		
13	P/F Submersible pumping set 1 HP	1	5-14-01	P-No		
14	P/F 400 gallon Tank	1	28/577	P-No		
15	P/F Wash hand basin complete	2	9/554+ 10/554	P-No		
16	P/F WC	1	3/353	P-No		
	Electrical items					
1	Supplying & installation Ceiling Fan 56" size	5	02-80-03	P-No		
2	Piano switch	35	2-64-01	P-No		
3	Supplying & installation Tube Light	8	2-78-03	P-No		
4	P/F Holder	18	2-67-01	P-No		
5	Point wiring	35	02-01-01	P-Point		

BALOCHISTAN WORKERS WELFARE BOARD

S.No 03= Annual repair of Boys High School, at Dalbandin

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
	P/F 3 pin socket	3	02-64-16	P-No	771	2,313
	Sub Total on at par					
	Add/Below _____% on at par					
	TOTAL BID AMOUNT					

In Figure _____

Signature of Contractor _____

BALOCHISTAN WORKERS WELFARE BOARD

S.No 04= Annual repair of Boys High School, at Pishin

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	White Wash 3 renewal coats on boundary wall	68,550.00	146/449	P%Sft		
2	Distemping Renewal Coat	47,704.92	158/450	P%Sft		
3	Repainting 2 coat on wall	9,000.00	171/451	P%Sft		
4	Weather shield 2 Renewal Coat	17,230.99	169/451	P%Sft		
5	Repainting 2 coat on wood work	3,792.95	165/450	P%Sft		
6	Repainting 2 coats on iron work	4,895.60	163/450	P%Sft		
7	P/A Plaster 3/4" thick	3,540.00	08/376	P%Sft		
8	P/F pannel door shutter	308.00	63/318	P-Sft		
9	P/F Broken glass	625.00	296/343	P Sft		
10	P/F wash hand basin complete	3	9/554+ 10/554	P-No		
11	P/F WC	1	3/353	P-No		
12	P/F Bib cock	10	02/570	P-No		
13	P/F 3" thick 1:2:4 floor in repair	2,450	92/443	P%Sft		
	Electrical items					
1	Supplying & installation Ceiling Fan 56" size	15	02-80-03	P-No		
2	Piano switch	65	2-64-01	P-No		
3	Supplying & installation Tube Light	15	2-78-03	P-No		
4	Point wiring	135	02-01-01	P-Point		

BALOCHISTAN WORKERS WELFARE BOARD

S.No 04= Annual repair of Boys High School, at Pishin

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
	P/F 3 pin socket	3	02-64-16	P-No	771	2,313
Sub Total on at par						
Add/Below _____% on at par						
TOTAL BID AMOUNT						

In Figure _____

Signature of Contractor _____

BALOCHISTAN WORKERS WELFARE BOARD

S.No 05= Annual repair of Boys High School, at Kingri

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	Distemping Renewal Coat	15,915	158/450	P%Sft		
2	Repainting 2 coat on wood work	2,129	165/450	P%Sft		
3	Repainting 2 coat on iron work	5,595	163/450	P%Sft		
4	White Wash 3 renewal coats boundary wall	44,157	146/449	P%Sft		
5	Repainting 2 coat on wall	20,996	171/451	P%Sft		
6	Weather shield 1 Renewal Coat	10,807	168/451	P%Sft		
7	P/F Broken glass	750	296/343	P%Sft		
8	P/F door shutter	288.00	22/313	P-Sft		
9	P/F 3" thick 1:2:4 floor in repair	4,230	92/443	P%Sft		
10	P/L 3/4" thick patch plaster	5,425	29/435	P%Sft		
11	P/L PPRC 3/4"	155	29/567	P-Rft		
12	P/L PPRC 1"	456	30/567	P-Rft		
13	P/F Submersible pumping set 1 HP	1	5-14-01	P-No		
14	P/F wash hand basin complete	1	9/554+ 10/554	P-No		
15	P/F WC	1	3/353	P-No		
	Electrical items					
1	Supplying & installation Tube Light	22	2-78-03	P-No		
2	Supplying & installation Ceiling Fan 56" size	9	02-80-03	P-No		
3	Piano switch	35	2-64-01	P-No		
4	P/F Holder	5	2-67-01	P-No		
5	Point wiring	15	02-01-01	P-Point		

BALUCHISTAN WORKERS WELFARE BOARD

S.No 05= Annual repair of Boys High School, at Kingri

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
	P/F 3 pin socket	4	02-64-16	P-No	771	3,084
	Sub Total on at par					
	Add/Below _____% on at par					
	TOTAL BID AMOUNT					

In Figure _____

Signature of Contractor _____

BALUCHISTAN WORKERS WELFARE BOARD
S.No 06= Annual repair of Girls High School, Eastern By pass Quetta
As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	White Wash 3 renewal coats on boundary wall	62,157	146/449	P%Sft		
2	Distemping Renewal Coat	20,995	159/450	P%Sft		
3	Repainting 2 coat on wall	15,915	171/451	P%Sft		
4	Weather shield 1 Renewal Coat	10,200	168/451	P%Sft		
5	Repainting 2 coat on wood work	2,129	165/450	P%Sft		
6	P/F Broken glass	525.00	296/343	P%Sft		
7	P/F 3" thick 1:2:4 floor in repair	1,985.00	92/443	P%Sft		
8	P/L 3/4" thick patch plaster	5,425.00	29/435	P%Sft		
9	P/L PPRC 1"	350	30/567	P-Rft		
10	Repainting 2 coat on iron work	5,592	163/450	P%Sft		
11	Wash hand basin	4	9/554+ 10/554	P-No		
12	P/F pannel door shutter	224.00	63/318	P-Sft		
13	P/F WC	4	3/353	P-No		
14	P/F Bib cock	25	02/570	P-No		
15	P/F Glazed tile on wall	325	40/165	P%Sft		
16	P/F Glazed tile on floor	154	81/242	P%Sft		
	Electrical items					
1	Supplying & installation Ceiling Fan 56" size	15	02-80-03	P-No		
2	Piano switch	50	2-64-01	P-No		
3	Supplying & installation Tube Light	25	2-78-03	P-No		
4	Point wiring	65	02-01-01	P-Point		

BALOCHISTAN WORKERS WELFARE BOARD

S.No 06= Annual repair of Girls High School, Eastern By pass Quetta

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
	P/F 3 pin socket	1	02-64-16	P-No	771	771
	Sub Total on at par					
	Add/Below _____% on at par					
	TOTAL BID AMOUNT					

In Figure _____

Signature of Contractor _____

BALOCHISTAN WORKERS WELFARE BOARD

S.No 07= Annual repair of Girls High School, Nawa Killi Quetta (2023-24)

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	White Wash 3 renewal coats on boundary wall	20,650	146/449	P%Sft		
2	Distempering Renewal Coat	51,420	158/450	P%Sft		
3	Repainting 2 coat on wall	9,325	171/451	P%Sft		
4	Weather shield 2 Renewal Coat	14,850	169/451	P%Sft		
5	P/L Panel Door Shutter	336	22/313	P-Sft		
6	P/F Broken glass	1,356	296/343	P%Sft		
7	P/F 3" thick 1:2:4 floor in repair	3,540	92/443	P%Sft		
8	P/F 3" thick 1:2:4 floor	450	7/231	P%Sft		
9	P/L PPRC 1"	200	30/567	P-Rft		
10	P/F Submersible pumping set 1 HP	1	5-14-01	P-No		
11	P/F wash hand basin complete	2	9/554+ 10/554	P-No		
12	P/F WC	1	3/353	P-No		
13	P/F GI Gate	265	15/285	P-Kg		
	Electrical items					
1	Supplying & installation Ceiling Fan 56" size	15	02-80-03	P-No		
2	Piano switch	45	2-64-01	P-No		
3	Supplying & installation Tube Light	12	2-78-03	P-No		
4	Point wiring	152	02-01-01	P-Point		

BALOCHISTAN WORKERS WELFARE BOARD

S.No 08= Annual repair of office Buidling at Samangli Road Quetta

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	White Wash 3 renewal coats on BW	25,654.00	146/449	P%Sft		
2	Distempering Renewal Coat	61,032.00	159/450	P%Sft		
3	Weather shield 2 Renewal Coat	1,250.00	169/451	P%Sft		
4	Repainting 2 coat on wood work	3,094.00	165/450	P%Sft		
5	Repainting 2 coats on iron work	5,403.00	163/450	P%Sft		
6	P/F Broken glass	245.00	296/343	PSft		
7	P/L Kerb Stone	758.00	115/497	P%Sft		
8	P/L tough paver	8,300.00	177/255	P Sft		
9	P/L 3/4" thick patch plaster	1,285.00	29/435	P%Sft		
10	P/A Flush Tank only	2	B 4496	Each		
11	P/F Bib Cock	6	1/570	Each		
12	P/F CP mixer 1/2 dia	2	6/570	Each		
13	P/F Looking Mirror	2	5/557	Each		
	Electrical items					
1	Supplying & installation Ceiling Fan 56" size	8	02-80-03	P-No		
2	Piano switch	25	2-64-01	P-No		
3	Supplying & installation Tube Light	10	2-78-03	P-No		
4	Point wiring	25	02-01-01	P-Point		

BALUCHISTAN WORKERS WELFARE BOARD

S.No 08= Annual repair of office Building at Samangli Road Quetta

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
	P/F 3 pin socket	3	02-64-16	P-No	771	2,313
	Sub Total on at par					
	Add/Below _____% on at par					
	TOTAL BID AMOUNT					

In Figure _____

Signature of Contractor _____

BALUCHISTAN WORKERS WELFARE BOARD

S.No 09= Repair/Raising of Boundary Wall at New Labour Colony Nawa Killi Quetta

As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	Providing and laying first class solid burnt brick masonry in set in 1:4 cement mortar in straight or curved walls including scaffolding, raking out joints curing etc.In ground floor superstructure 9" to 13-1/2 (229 mm to 232 mm) thick wall including scaffolding out joints and curing etc.	5227.50	146/449	P%Sft		

BALOCHISTAN WORKERS WELFARE BOARD

S.No 10= Annual repair of Boys High School, Loralai
As per Pak PWD Schedule of Rates 2022 (BOQ for Tender)

S.No	Description	Quantity	Schedule items	Unit	Rate (Rs)	Amount (Rs)
1	White Wash 3 renewal coats	20,450	146/449	P%Sft		
2	Distempering 3 Renewal Coat	27,850	160/450	P%Sft		
3	Repainting 2 coat on wall	6,250	171/451	P%Sft		
4	Weather shield 2 Renewal Coat	20,456	169/451	P%Sft		
5	Repainting 2 coat on wood work	1,655	165/450	P%Sft		
6	Repainting 2 coats on iron work	2,850	163/450	P%Sft		
7	P/L Panel Door Shutter	308.00	22/313	P-Sft		
8	P/F wire gauze	250.00	106/444	P%Sft		
9	P/F Broken glass	652.00	296/343	P%Sft		
10	P/F 3" thick 1:2:4 floor in repair	3,526.00	92/443	P%Sft		
11	P/F 3" thick 1:2:4 floor	350.00	7/231	P%Sft		
12	P/L 3/4" thick patch plaster	3,256.00	29/435	P%Sft		
13	P/Making man hole cover	25.00	29/595	P-Sft		
14	P/F Steel	500.00	166/197	P KG		
15	Brick work in SS	315.00	25/135 + 79/140	P%Cft		
16	1:2:4 in Col SS	25.00	24/176+ 136/195	P%Cft		
17	Earth filling	350	8/48	P%Cft		
18	P/A Plaster 3/4" thick	620.00	8/376	P%Sft		
19	P/F G.I pipe 3/4"	156	2/565	P-Rft		
20	P/L PPRC 1"	150	30/567	P-Rft		
21	P/F wash hand basin complete	6	9/554+ 10/554	P-No		
22	P/F Glazed tile on wall	350	40/165	P%Sft		
23	P/F Glazed tile on floor	152	81/242	P%Sft		
	Electrical items					
1	Supplying & installation Ceiling Fan 56" size	12.00	02-80-03	P-No		
2	Piano switch	35	2-64-01	P-No		
3	Supplying & installation Tube Light	10	2-78-03	P-No		
4	Point wiring	120	02-01-01	P-Point		

